VFR FLYWAY

# VFR TERMINAL AREA CHART
# CINCINNATI

CINCINNATI

Airports having Control Towers are shown in Blue, all others in Magenta. Consult Chart Supplement for details involving airport lighting, navigation aids, and services. All times are local. For additional symbol information refer to the Chart User's Guide.

CAUTION: Severe turbulence may occur over rugged terrain. See AIM.

For weather camera information visit https://weathercams.faa.gov

CAUTION: This chart is primarily designed for VFR navigational purposes and does not purport to indicate the presence of all power transmission and telecommunication lines, terrain or obstacles which may be encountered below reasonable and safe altitudes.

Flight Following Services are available on request and highly recommended in and around Class B, C, and TRSA areas.

Class G Airspace within the United States extends up to 14,500 feet MSL. At and above this altitude all airspace is within Class E Airspace, excluding the airspace less than 1500 feet above the terrain and certain special use airspace areas.

Entire area of this chart is within the Eastern Standard Time Zone +5(+4 DT)=UTC

CONVERSION OF ELEVATIONS

FEET (Thousands) 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30

METERS (Thousands) 0 1 2 3 4 5 6 7 8 9

## AIRPORTS

- Other than hard-surfaced runways
- Hard-surfaced runways 1500 ft. or greater
- Open dot within hard-surfaced runway configuration indicates approximate VOR, VOR-DME, DME or VORTAC location.

Seaplane Base

All recognizable hard-surfaced runways, including those closed, are shown for visual identification. Airports may be public or private.

## ADDITIONAL AIRPORT INFORMATION

- Private (Pvt) - Non-public use having landmark value
- Military - Other than hard-surfaced; all military airports are identified by abbreviations AFB, NAS, AAF, etc.
- Heliport Selected
- Unverified
- Abandoned - paved having landmark value, 3000 ft. or greater
- Ultralight Flight Park Selected

Fuel availability indicated by use of tick marks around basic airport symbol. Consult Supplement for details and availability at airports with hard-surfaced runways 1500 ft. or greater.

☆ Rotating airport beacon in operation Sunset to Sunrise

OBJECTIONABLE - Airport may adversely affect airspace use.

## AIRPORT DATA

Box indicates FAR 93 Special Air Traffic Rules & Airport Traffic Patterns

Runways with Right Traffic Patterns (public use) ● RP Special conditions exist - see Supplement.

FSS - Flight Service Station

NO SVFR - Fixed-wing special VFR flight is prohibited.

CT - 118.3 - Control Tower (CT) - primary frequency

★ - Star indicates operation part-time. See tower frequencies tabulation for hours of operation.

Follows the Common Traffic Advisory Frequency (CTAF)

Weather Camera

ATIS 123.6 - Automatic Terminal Information Service

AFIS 135.2 - Automatic Flight Information Service (AK)

ASOS/AWOS 135.42 - Automated Surface Weather Observing Systems (shown where full-time ATIS not available). Some ASOS/AWOS facilities may not be located at airports.

UNICOM - Aeronautical advisory station

VFR Advsy - VFR Advisory Service shown where full-time ATIS not available and frequency is other than primary CT frequency.

285 - Elevation in feet

L - Lighting in operation Sunset to Sunrise

*L - Lighting limitations exist; refer to Supplement.

72 - Length of longest runway in hundreds of feet; usable length may be less.

When information is lacking, the respective character is replaced by a dash. Lighting codes refer to runway edge lights and may not represent the longest runway or full length lighting.

FAA Identifier (FAA) / ICAO Identifier (PNAM)

Location Identifier

CAO Location Indicator shown outside contiguous U.S.

VFR Advsy 125.0 UNICOM

AOE - Airport of Entry

## AIRPORT TRAFFIC SERVICE AND AIRSPACE INFORMATION

Only the controlled and reserved airspace effective below 18,000 ft. MSL are shown.

- Class B Airspace
- Class C Airspace (Mode C - see FAR 91.215(AIM).)
- Class D Airspace

40 Ceiling of Class D Airspace in hundreds of feet (A minus ceiling value indicates surface up to but not including that value.)

- Class E (sfc) Airspace

CLASS G Class E Airspace with floor 700 ft. above surface that laterally abuts Class G Airspace.

Class E Airspace with floor 700 ft. above surface that laterally abuts 1200 ft. or higher Class E Airspace

Class E Airspace with floor 1200 ft. or greater above surface that laterally abuts Class G Airspace

2400 MSL / 4500 MSL Differentiates floors of Class E Airspace greater than 700 ft. above surface.

Class E Airspace exists at 1200' AGL unless otherwise designated as shown above.

Class E Airspace low altitude Federal Airways and RNAV 2 Routes are indicated by center line. Intersection - Arrows are directed towards facilities which establish intersection.

132 V 69 Total mileage between NAVAIDs on direct Airways

T 319 TK 313 (Helicopter Only) 169 RNAV Waypoint

- Prohibited, Restricted, and Warning Areas
- *Alert Area and Military Operations Area (MOA) *Alert Areas do not extend into Class A, B, C and D airspace, or Class E airport surface areas.
- Special Airport Traffic Area (See FAR 93 for details.)
- National Defense Airspace
- Temporary Flight Restriction Area
- ADIZ - Air Defense Identification Zone
- MODE C (See FAR 91.215(AIM).)
- National Security Area
- Terminal Radar Service Area (TRSA)
- IR241 MTR - Military Training Route
- IFR Departure Route
- IFR Arrival Route
- IFR Arrival/Departure Route

## COMMUNICATION BOXES

122.6 OAKDALE 362 / 313.6 OAK

Underline indicates no voice on frequency.

Crosshatch indicates Shutdown status.

★ - Operates less than continuous or On-Request.

A - ASOS/AWOS

S - Weather Camera

122.1R MIAMI - FSS radio providing voice communication

123.6 HOMER HOM

Heavy line box indicates Flight Service Station (FSS). Frequencies 121.5, 122.2 and 243.0 are available at many Alaskan FSSs and are not shown above boxes. All other frequencies are shown.

R - Receive only

Frequencies above thin line box are remoted to NAVAID site. Other FSS frequencies providing voice communication may be available as determined by altitude and terrain. Consult Supplement for complete information.

## RADIO AIDS TO NAVIGATION

- VHF OMNI RANGE (VOR)
- VOR-DME
- DME
- VORTAC
- Other facilities, i.e., FSS Outlet, RCO, etc.
- Non-Directional Radio Beacon (NDB)
- NDB - DME

## OBSTRUCTIONS (may be lit or unlit)

- 1000 ft and higher AGL
- Above 200 ft & below 1000 ft AGL, (above 299 ft AGL in urban area)
- Obstruction with high-intensity lights; may operate part-time
- Wind Turbine
- Group Obstruction
- Wind Turbine Farm
- Elevation of the top above mean sea level
- Height above ground
- Under construction or reported; position and elevation unverified
- 2894 UC (1149) UC
- NOTICE: Guy wires may extend outward from structures.

## MISCELLANEOUS

- A - Aerobatic Practice Area (See Supplement.)
- G - Glider Operations
- H - Hang Glider Activity
- U - Ultralight Activity
- UA - Unmanned Aircraft Activity
- Parachute Jumping Area (See Supplement.)
- STADIUM - Intermittent TFR site within 3 NM, up to & incl 3000' AGL
- Marine Light
- VPXYZ VFR Waypoints
- Space Launch Activity Area
- 1°E Isogonic Line (2020 VALUE)
- NAME (VPXYZ)

## TOPOGRAPHIC INFORMATION

- Power Transmission Line
- Aerial Cable
- Lookout Tower
- 618 (Elevation Base of Tower)
- Mountain Pass
- 11823 (Elevation of Pass)

Pass symbol does not indicate a recommended route or direction of flight and pass elevation does not indicate a recommended clearance altitude. Hazardous flight conditions may exist within and near mountain passes.

# CINCINNATI TAC

VFR TERMINAL AREA CHART SCALE 1:250,000

Federal Aviation Administration

EFFECTIVE 0901Z 19 MAR 2026

TO 0901Z 14 MAY 2026

Consult NOTAMs for latest information

Consult/Subscribe to FAA Safety Alerts and Charting Notices at:

http://www.faa.gov/air_traffic/flight_info/aeronav/safety_alerts/

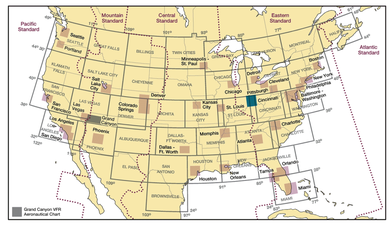


Published from digital files compiled in accordance with Interagency Air Committee specifications and agreements approved by Department of Defense - Federal Aviation Administration.

Warning: Refer to current foreign charts and flight information publications for information within foreign airspace.

FAA Product ID: TCIN

NSN 7641014607683

NGA REF. NO. VFRTACINCINNATI

EFF. DATE 26078

## CONTROL TOWER FREQUENCIES ON CINCINNATI TERMINAL AREA CHART

Airports with control towers are indicated on the face of the chart by the letters CT followed by the primary VHF tower frequency(ies). Information for each tower is listed in the table below. Operational hours are local time. The primary VHF and UHF tower and ground control frequencies are listed.

Automatic Terminal Information Service (ATIS) frequencies shown on the face of the chart are arrival VHF/UHF frequencies. All ATIS frequencies are listed in the table below. ATIS operational hours may differ from tower operational hours.

ASR and/or PAR indicate Radar Instrument Approach available.

*MON-FRI* indicates Monday through Friday.

O/T indicates other times.

| CONTROL TOWER | OPERATES | TOWER | GND CON | ATIS | ASR/PAR |
|---|---|---|---|---|---|
| CINCINNATI MUNI/LUNKEN FLD | 0700-2300 | 118.7 257.8 | 121.9 | 123.6 | |
| CINCINNATI/NORTHERN KENTUCKY INTL | CONTINUOUS | 118.3 (RWYS 18C/36C & 09/27) 133.325 (RWY 18R/36L) 118.975 360.85 (RWY 18L/36R) | 121.7 | 134.375 (ARR) 133.3 (DEP) | |
| JAMES M COX DAYTON INTL | CONTINUOUS | 119.9 257.7 | 121.9 | 125.8 | |
| WILMINGTON AIR PARK | CONTINUOUS | 119.475 | 121.6 | 124.925 | |
| WRIGHT-PATTERSON AFB | CONTINUOUS | 127.8 281.45 | 121.8 335.8 | 124.475 269.9 | |

## CLASS B, CLASS C, TRSA, AND SELECTED APPROACH CONTROL FREQUENCIES

| FACILITY | FREQUENCIES | SERVICE AVAILABILITY |
|---|---|---|
| CINCINNATI CLASS B | 121.0 254.25 (001°-180°) 128.7 254.25 (181°-360°) | CONTINUOUS |
| DAYTON CLASS C | 134.45 323.15 (181°-090°) 118.85 303.2 (091°-180°) | CONTINUOUS |

## SPECIAL USE AIRSPACE ON CINCINNATI TERMINAL AREA CHART

Unless otherwise noted altitudes are MSL and in feet. Time is local. "TO" on altitude means "To and including." FL = Flight Level NO A/G = No air to ground communications. Contact Flight Service for information.

† Other times by NOTAM. NOTAM = Use of this term in Restricted Areas indicates FAA and DoD NOTAM systems. Use of this term in all other Special Use areas indicates the DoD NOTAM system.

### U.S. P-PROHIBITED, R-RESTRICTED, W-WARNING, A-ALERT, MOA-MILITARY OPERATIONS AREA

| NUMBER | ALTITUDE | TIME OF USE | CONTROLLING AGENCY/ CONTACT FACILITY | FREQUENCIES |
|---|---|---|---|---|
| R-3403 A | TO 43,000 | 0630-2400 | INDIANAPOLIS CNTR | 124.77 |
| R-3403 B | 1200 AGL TO FL 180 | 0800-2300 | INDIANAPOLIS CNTR | 124.77 |

| MOA NAME | ALTITUDE* | TIME OF USE† | CONTROLLING AGENCY/ CONTACT FACILITY | FREQUENCIES |
|---|---|---|---|---|
| BUCKEYE | 5000 | 0800-2200 MON-FRI 0800-1600 SAT-SUN | INDIANAPOLIS CNTR | 134.0 135.57 |
| JPG A | 500 AGL TO BUT NOT INCL 6000 | 0800-2300 | INDIANAPOLIS CNTR | |
| JPG C | 6000 | 0800-2300 | INDIANAPOLIS CNTR | |
| JPG D | 500 AGL TO BUT NOT INCL 4000 | 0800-2300 | INDIANAPOLIS CNTR | |

*Altitudes indicate floor of MOA. All MOAs extend to but do not include Ft 180 unless otherwise indicated in tabulation or on chart. †Other times by DoD NOTAM.

ATTENTION

THIS CHART CONTAINS MAXIMUM ELEVATION FIGURES (MEF). The Maximum Elevation Figures shown in quadrangles bounded by ticked lines of latitude and longitude are represented in THOUSANDS and HUNDREDS of feet above mean sea level. The MEF is based on information available concerning the highest known feature in each quadrangle, including terrain and obstructions (trees, towers, antennas, etc.).

Example: 12,500 feet ..... 125

Features normally used as checkpoints for controlling VFR traffic are emphasized on this series of charts so they may be readily identified.

Example: POWER PLANT

The name shown is that used by the controlling personnel and is not necessarily the official name of the feature.

Lambert Conformal Conic Projection Standard Parallels 33° and 45°

Horizontal Datum: North American Datum of 1983 (World Geodetic System 1984)

CTC COLUMBUS APP WITHIN 20 NM ON 134.45 323.15

CAUTION EXTENSIVE MILITARY AIRCRAFT LANDING/DEPARTING WRIGHT-PATTERSON AFB

CTC COLUMBUS APP WITHIN 20 NM ON 118.85 305.2

CTC CINCINNATI APP ON 126.7 254.25

CTC CINCINNATI APP ON 128.7 254.25

CTC CINCINNATI APP ON 121.0 254.25

CINCINNATI CLASS B AIRSPACE

See back of this chart for procedural information within the Cincinnati Class B Airspace

EXAMPLES OF CLASS B ALTITUDES

70 - Ceiling in hundreds of feet MSL

30 - Floor in hundreds of feet MSL

CINCINNATI

O NAUTICAL MILES 0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75

O STATUTE MILES 0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85

O KILOMETERS 0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135

# VFR FLYWAY PLANNING CHART
# CINCINNATI
Scale 1:250,000
NOT TO BE USED FOR NAVIGATION

**AIRPORTS**
Paved Runways
NAME (NAM)
NAME (NAM)
Unpaved Runways
NAME (NAM)

**RADIO AIDS TO NAVIGATION**
VOR — DLG 138.8
NDB — DCW 262
VORTAC — PPS 121.8
NDB-DME — RMW 320
VOR-DME — KIP 110.7
DME — PVU CH 21 (108.4)

**AIRPORT TRAFFIC SERVICE AND AIRSPACE INFORMATION**

Class B Airspace
Class C Airspace (Mode C - see FAR 91.215/AIM.)
Class B/C Surface Area
Prohibited, Restricted, and Warning Areas
*Alert Area and Military Operations Area (MOA)

*Alert Areas do not extend into Class A, B, C and D airspace, or Class E airport surface areas.

Examples of Class B Airspace Altitudes
70 --- Ceiling in hundreds of feet MSL
30 --- Floor in hundreds of feet MSL
Mode C (See FAR 91.215/AIM.)
Class D Airspace
40 Ceiling of Class D Airspace in hundreds of feet (A minus ceiling value indicates surface up to but not including that value.)
Class E (sfc) Airspace

Suggested VFR Flyway and Altitude
2600 6700

IFR Departure Routes
IFR Arrival Routes
IFR Arrival/Departure Routes

**OBSTRUCTIONS** (Selected) (may be lit or unlit) 2049

**MISCELLANEOUS** Navigation Reference Point N39° 56.32' W120° 36.91'

**TOPOGRAPHIC INFORMATION** 12256 Mountain Top or Peak and Spot Elevation

THIS CHART IDENTIFIES VFR FLYWAYS DESIGNED TO HELP VFR PILOTS AVOID MAJOR CONTROLLED TRAFFIC FLOWS. IT DEPICTS MULTIPLE VFR ROUTINGS THROUGHOUT THE CINCINNATI AREA WHICH MAY BE USED AS ALTERNATES TO FLIGHT WITHIN THE ESTABLISHED CLASS B AIRSPACE. ITS GROUND REFERENCES PROVIDE A GUIDE FOR IMPROVED VISUAL NAVIGATION. THIS IS NOT INTENDED TO DISCOURAGE REQUESTS FOR VFR OPERATIONS WITHIN THE CLASS B AIRSPACE BUT IS DESIGNED SOLELY FOR INFORMATION AND PLANNING PURPOSES.

## CAUTION

THE ENTIRE CINCINNATI AREA IS HEAVILY CONGESTED WITH MANY DIFFERENT AIRCRAFT TYPES. THESE ROUTE SUGGESTIONS ARE NOT STERILE OF OTHER TRAFFIC; THEY ARE AREAS WE BELIEVE LEAST CONGESTED IN AN AREA OF HEAVY CONGESTION. PILOT ADHERENCE TO VFR RULES MUST BE EXERCISED AT ALL TIMES. COMMUNICATIONS MUST BE MAINTAINED BETWEEN AIRCRAFT AND CONTROL TOWERS WHILE IN CLASS D AIRSPACE.

REPORTING CHART ERRORS

You are requested to inform us of chart errors and/or additions that come to your attention while using this chart. See frequently asked questions (FAQs) on our website at http://faa.gov/go/ais/ prior to contacting us via toll free number at 1-800-638-8972 or visit https://www.faa.gov/air_traffic/flight_info/aeronav/aero_data/ or mail to: FAA, Aeronautical Information Services,1305 East-West Highway, SSMC 4, Suite 4400, Silver Spring, MD 20910-3281.

FOR PROCUREMENT: For digital products, visit http://www.faa.gov/air_traffic/flight_info/aeronav/digital_products/ For a list of approved FAA Print Providers, visit our website at: http://www.faa.gov/air_traffic/flight_info/aeronav/print_providers/

NORTH AMERICAN AEROSPACE DEFENSE COMMAND (NORAD) PROCEDURES

All aircraft operating in the U.S. national airspace, if capable, will maintain a listening watch on guard frequencies VHF 121.5 or UHF 243.0. It is incumbent upon all aviators to know and understand their responsibilities if intercepted. Review "AIM" section 5-6-13 for intercept procedures. Additionally, if U.S. military fighter jets intercept an aircraft and flares are dispensed in the area of that aircraft, aviators will pay strict attention, contact air traffic control immediately on the local frequency or on VHF guard 121.5 or UHF 243.0 and follow the interceptor visual ICAO signals. Be advised that non-compliance may result in the use of force.

CAUTION: Unmanned Aircraft Systems (UAS) may be approved to operate above critical infrastructure including obstacles and linear features such as high-voltage powerlines, pipelines, and railroads. Check NOTAMs and see AIM for details.

MILITARY TRAINING ROUTES (MTRs)

All IR and VR MTRs are shown, and may extend from the surface upwards. Only the route centerline, direction of flight along the route, and the route designator are depicted - route widths and altitudes are not shown.

DoD users refer to Area Planning AP/1B Military Training Routes North and South America for current routes.

CINCINNATI CLASS B AIRSPACE

OPERATING RULES AND PILOT/EQUIPMENT REQUIREMENTS. Regardless of weather conditions, an ATC authorization is required prior to operating within the Class B Airspace. Pilots should not request an authorization to operate within the Class B Airspace unless the requirements of FAR 91.215 and FAR 91.131 are met. Included among those requirements are:

1. Unless otherwise authorized by ATC, an operable two-way radio capable of communicating with ATC on appropriate frequencies for that Class B Airspace.
2. No person may take off or land a civil aircraft at an airport within the Class B Airspace or operate a civil aircraft within the Class B Airspace unless:
   (a) The pilot in command holds at least a Private Pilot certificate, or holds a Recreational Pilot certificate and has met the requirements of FAR 61.101(d); or holds a Sport Pilot certificate and has met the requirements of FAR 61.325, or;
   (b) The aircraft is operated by a student pilot who has met the requirements of FAR 61.94 or FAR 61.95 as applicable.
3. Unless otherwise authorized by ATC, each person operating a large turbine engine-powered aircraft to or from a primary airport shall operate at or above the designated floors while within the lateral limits of the Class B Airspace.
4. An operable VOR or TACAN receiver for IFR operations.
5. A transponder with automatic altitude reporting equipment.

NOTE: ATC may, upon notification, immediately authorize a deviation from the altitude reporting equipment requirement or for a transponder failure; however, other requests for deviations from the transponder equipment requirement must be submitted to the controlling ATC facility at least one hour before the proposed operation.

FLIGHT PROCEDURES

IFR FLIGHTS— Aircraft operating within the Cincinnati Class B Airspace must be operated in accordance with ATC clearances and instructions.

VFR FLIGHTS—

1. Arriving aircraft should contact the appropriate approach control on specified frequencies and in relation to geographic fixes shown on the accompanying chart. Although arriving aircraft may be operating beneath the floor of the Class B Airspace on initial contact, communications should be established with approach control in relation to the points indicated for sequencing and spacing purposes.
2. Aircraft departing the primary airports are requested to advise clearance delivery prior to taxiing of their intended altitude and direction of flight to depart the Class B Airspace. Aircraft departing from other than the primary airports whose route of flight would penetrate the Class B Airspace should give this information to ATC on the appropriate frequencies.
3. Aircraft desiring to transit the Class B Airspace must obtain an ATC clearance to enter the Class B Airspace and will be handled on an ATC workload permitting basis.

ATC PROCEDURES

All aircraft will be controlled and separated while operating within the Class B Airspace, except helicopters need not be separated from other helicopters. Although radar separation will be the primary standard used, approved visual and other nonradar procedures will be applied as required or deemed appropriate. Traffic information on observed but unidentified radar targets will be provided on a workload permitting basis to aircraft operating outside the Class B Airspace.

NOTE: Assignment of radar headings and/or altitudes is based on the provision that a pilot operating in accordance with visual flight rules is expected to advise ATC if compliance with an assigned route, radar heading, or altitude will cause the pilot to violate such rules.